

Technical Data Sheet for H&W FSC® Bambus TerrassePlank Pro™, Cognac

Item: 188911, 188912

Product Description

FSC® Bambus TerrassePlank Pro™, Cognac, is the superior choice for all exterior decking applications and has been used worldwide in many commercial and residential projects. FSC® Bambus TerrassePlank Pro™, Cognac, is solid and high density decking board, made from compressed bamboo fibers with a special, patented CeramiX process, making it one of the strongest, hardest and most durable materials on the market to create the perfect space for exterior entertainment and relaxation. Only two decking profiles are needed for your exterior decking application. A single grooved (G1) plank used as starter and ending plank and the G2 for the deck itself. Like any untreated tropical hardwood species, when exposed to exterior conditions, decking will turn grey over time creating a very natural look.

Product Technical Specification and Tolerance



Properties	Standard
Dimension and Tolerance	dimension : 3050mm x137/155mm x 20mm length tolerance: ±1mm width tolerance: ±0.2mm thickness tolerance: ±0.2mm
Density/Specific Gravity	1,200kg/m ³
Moisture content	10%±2
Reaction to fire classification	Bfl-s1 (DIN EN 13501-1:2010)
Resistance to indentation (Brinell hardness)	79.2N/mm ² (DIN EN 1534)
Bending Strength (MOR)	73.8N/mm ² (DIN EN 40)
Modulus of Elasticity (MOE)	16700N/mm ² (DIN EN 40)
Determination of the anti-slip properties	wave- B smooth- B (DIN 51097:1992, GUV-I 8527:1999)
Resistance against termites	class DC D (durable) (EN 117:2012)
Durability-wood decay basidiomycete fungi	class 1(very durable) CEN/TS 15083-1:2005 EN 350:2016
Durability-soft rot fungi	class 1(very durable) CEN/TS 15083-1:2005 EN 350:2016
Resistance against blue stain fungi	0 (EN 152:2011)
Resistance against mould fungi	0 (DIN EN ISO 846:1997-10 (method A))

Release of Formaldehyde	E1(0.1mg/m ² h) (GB/T17657-2013) Swelling rate in thickness: 4.0 %
Moisture Resistance and dimensional stability	Swelling rate in width: 0.6 % Swelling rate in length: 0.0 % Water absorption: 7.4 % (DIN EN 15534-1, § 8.3.)
Appearance	Both Smooth and Reeded surfaces could be used as top surface. The main surface texture is straight grain, smooth texture, the color is greyish yellow when unfinished and turn to rich deep yellow after primed with penetrating oiled. Natural grain and color may vary as this is a natural fiber product
Cupping	≤ 0.3 mm
Warping	≤ 6mm and quantity is less than 10%.
Banana Shape	≤ 1mm/m along the length of the panels
Bamboo Nodes	Nodes are separated its width ≤ 10 mm
Height Difference	≤ 0.5mm
Tool Marks	Minor
T&G	Waxed, dimension as shown in technical drawing
Finishes	WOCA fully cured, uniform with no excess
Thickness Swelling Rate of Water Absorption Test	≤ 3%, no obvious cracking in cross cut end in 100°C hot water for 1 hour
Packaging and label	According to packaging layout drawing, check the label

Storage

- The warehouse should be well ventilated, with relative humidity from 45 to 75% at temperatures ranging from 50°F (+10°C) to 104°F (+40°C).
- Do not store product in pest infested and/or unsuitable warehouse.
- Leave the products in its original package when not in use, cover the bundles from top and bottom to avoid the influence of climatic events and other environmental hazards.
- Store the product horizontally on the ground with pallet shoe on every pallet. The bottom pallet should be placed on an even footing on spacer-pads or palettes. The maximum height of stacked bundles should not exceed 4.5 m.
- The difference between the spacers should not be more than 600mm, with distance of starting and ending spacer from the edge of the bundle not exceeding 200mm (the number of spacers should not be less than 3).

188911

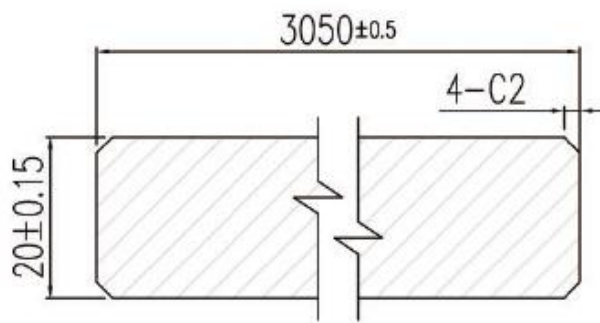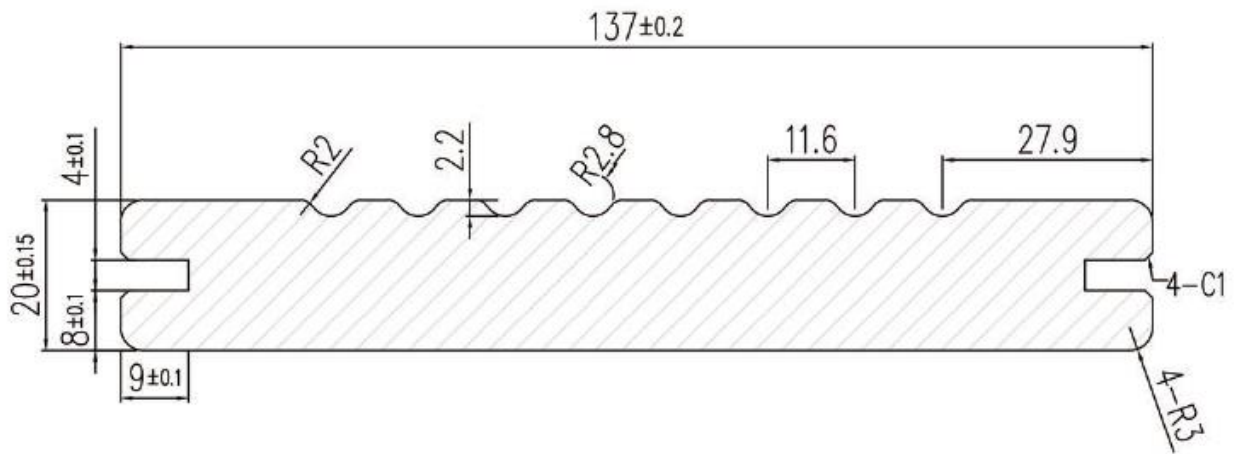

188912

